


Product Data Sheet

1. Flanged fittings
 1.01 Flanged Bends
30° flanged bend (FFK 30°) PN10/16

Material EN 1563 EN-GJS-400-15
Design Std. EN 545
Coating Epoxy GSK RAL-GZ 662
Approval Kiwa BRL-K772/04



Kolk flanged fittings are made of ductile iron GJS-400/500 (DIN1693 GGG-40/50). Designed acc. to EN 545, flange drilling acc. to EN 1092-2 (ISO 7005-2). Epoxy coated (Resicoat®) acc. to EN 14901 (DIN 30677-2) and GSK certified (RAL-GZ 662).

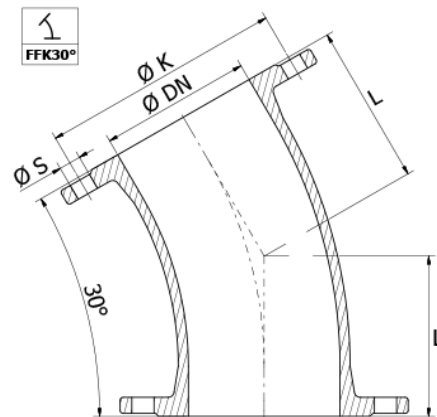

30° flanged bend (FFK 30°) PN10/16

Article	Article Nr.	PN	ø DN [mm]	L [mm]	Holes # [DN]	ø K [mm]	ø S [mm]	G [kg]						
FFK 50/30°	1.02FFK1.000015	PN10/16	50	150	4	125	19	9						
FFK 65/30°	1.02FFK1.000025	PN10/16	65	165	4	145	19	10						
FFK 80/30°	1.02FFK1.000035	PN10/16	80	130	8	160	19	10						
FFK 100/30°	1.02FFK1.010015	PN10/16	100	140	8	180	19	12						
FFK 125/30°	1.02FFK1.010025	PN10/16	125	150	8	210	19	16						
FFK 150/30°	1.02FFK1.010035	PN10/16	150	160	8	240	23	19						
FFK 200/30°	1.02FFK2.020015	PN10	200	180	8	295	23	29						
FFK 250/30°	1.02FFK2.020025	PN10	250	210	12	350	23	42						
FFK 300/30°	1.02FFK2.030015	PN10	300	255	12	400	23	60						
FFK 350/30°	1.02FFK2.030025	PN10	350	165	16	460	23	65						
FFK 400/30°	1.02FFK2.040015	PN10	400	183	16	515	28	72						
FFK 450/30°	1.02FFK2.040025	PN10	450	349	20	565	28	90						
FFK 500/30°	1.02FFK2.050015	PN10	500	220	20	620	28	110						
FFK 600/30°	1.02FFK2.060015	PN10	600	309	20	725	31	210						
FFK 700/30°	1.02FFK2.070015	PN10	700	346	24	840	31	360						
FFK 800/30°	1.02FFK2.080015	PN10	800	383	24	950	34	495						
FFK 900/30°	1.02FFK2.090015	PN10	900	420	28	1050	34	580						
FFK 1000/30°	1.02FFK2.100015	PN10	1000	455	28	1160	37	760						
FFK 1200/30°	1.02FFK2.120015	PN10	1200	530	32	1380	41	1200						
FFK 200/30°	1.02FFK3.020015	PN16	200	180	12	295	23	29						
FFK 250/30°	1.02FFK3.020025	PN16	250	210	12	355	28	42						

30° flanged bend (FFK 30°) PN10/16

Article	Article Nr.	PN	∅ DN [mm]	L [mm]	Holes # [DN]	∅ K [mm]	∅ S [mm]	G [kg]						
FFK 300/30°	1.02FFK3.030015	PN16	300	255	12	410	28	60						
FFK 350/30°	1.02FFK3.030025	PN16	350	165	16	470	28	70						
FFK 400/30°	1.02FFK3.040015	PN16	400	183	16	525	31	82						
FFK 450/30°	1.02FFK3.040025	PN16	450	349	20	585	31	106						
FFK 500/30°	1.02FFK3.050015	PN16	500	220	20	650	34	138						
FFK 600/30°	1.02FFK3.060015	PN16	600	309	20	770	37	250						
FFK 700/30°	1.02FFK3.070015	PN16	700	346	24	840	37	380						
FFK 800/30°	1.02FFK3.080015	PN16	800	383	24	950	41	530						
FFK 900/30°	1.02FFK3.090015	PN16	900	420	28	1050	41	630						
FFK 1000/30°	1.02FFK3.100015	PN16	1000	455	28	1170	44	820						
FFK 1200/30°	1.02FFK3.120015	PN16	1200	530	32	1390	50	1320						

TRAN-SIG-MA

Tran-Sig-Ma spol. s r.o.
 Dukelských hrdinů 19
 170 00 Praha 7 Czech
 Republic

Tel: 00420 233 373 040,
 00420 233 370 903,
 00420 233 380 185
 E-mail: info@tran-sig-ma.cz
<http://www.tran-sig-ma.cz>