

Product Data Sheet

2. Tyton fittings

2.03 Double socket bend

Double socket bend 11¼° (MMK 11¼°) PN10/16

Material EN 1563 EN-GJS-400-15

Design Std. EN 545

Coating Epoxy GSK RAL-GZ 662


Approval Kiwa BRL-K772/04



GÖTTEZEICHEN
DIPLOMIERTES QUALITÄTSSYMBOL
VON AMMUTUM UND OBERFLÄCHE



Kolk Tyton fittings are made of ductile iron GJS-400/500 (DIN1693 GGG-40/50). Design acc. to EN 545, flange drilling acc. to EN 1092-2 (ISO 7005-2). Epoxy coated (Resicoat®) acc. to EN 14901 (DIN 30677-2) and GSK certified (RAL-GZ 662).

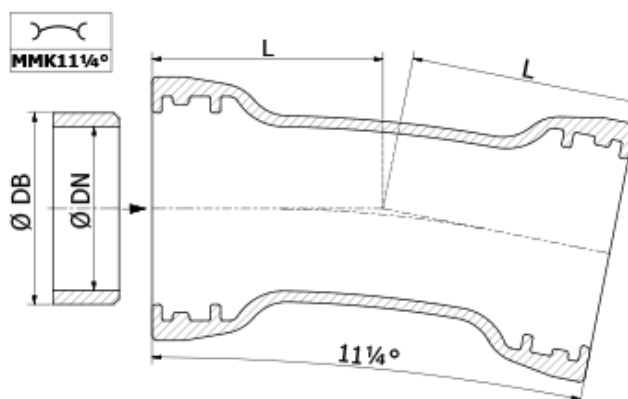

Double socket bend 11¼° (MMK 11¼°) PN10/16

Article	Article Nr.	PN	ø DN [mm]	ø DB [mm]	L [mm]	G [kg]								
MMK 80-11¼°	2.04MMK1.000011	PN10/16	80	98	30	7								
MMK 100-11¼°	2.04MMK1.010011	PN10/16	100	118	30	8								
MMK 125-11¼°	2.04MMK1.010021	PN10/16	125	144	35	11								
MMK 150-11¼°	2.04MMK1.010031	PN10/16	150	170	40	14								
MMK 200-11¼°	2.04MMK1.020011	PN10/16	200	222	45	20								
MMK 250-11¼°	2.04MMK1.020021	PN10/16	250	274	55	28								
MMK 300-11¼°	2.04MMK1.030011	PN10/16	300	326	55	37								
MMK 350-11¼°	2.04MMK1.030021	PN10/16	350	378	60	45								
MMK 400-11¼°	2.04MMK1.040011	PN10/16	400	429	65	56								
MMK 450-11¼°	2.04MMK1.040021	PN10/16	450	477	70	80								
MMK 500-11¼°	2.04MMK1.050011	PN10/16	500	532	75	87								
MMK 600-11¼°	2.04MMK1.060011	PN10/16	600	635	85	120								
MMK 700-11¼°	2.04MMK1.070011	PN10/16	700	738	95	200								
MMK 800-11¼°	2.04MMK1.080011	PN10/16	800	842	110	260								
MMK 900-11¼°	2.04MMK1.090011	PN10/16	900	948	120	290								
MMK 1000-11¼°	2.04MMK1.100011	PN10/16	1000	1048	130	490								
MMK 1200-11¼°	2.04MMK1.120011	PN10/16	1200	1255	150	760								