

Product Data Sheet

2. Tyton fittings

2.03 Double socket bend

Double socket bend 30° (MMK 30°) PN10/16

Material EN 1563 EN-GJS-400-15


Design Std. EN 545

Coating Epoxy GSK RAL-GZ 662

Approval Kiwa BRL-K772/04



Kolk Tyton fittings are made of ductile iron GJS-400/500 (DIN1693 GGG-40/50). Design acc. to EN 545, flange drilling acc. to EN 1092-2 (ISO 7005-2). Epoxy coated (Resicoat®) acc. to EN 14901 (DIN 30677-2) and GSK certified (RAL-GZ 662).

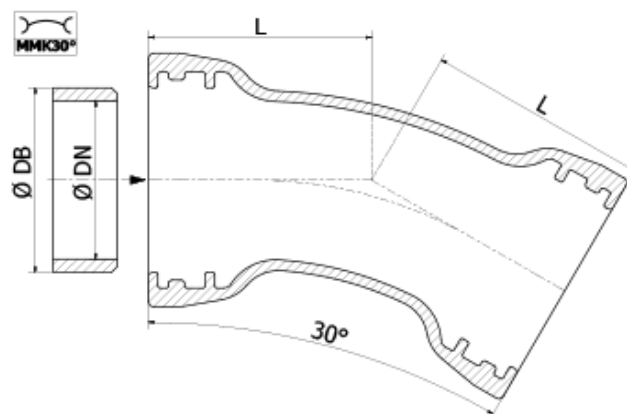

Double socket bend 30° (MMK 30°) PN10/16

| Article | Article Nr. | PN | Ø DN [mm] | Ø DB [mm] | L [mm] | G [kg] | | | | | | | | |
|--------------|-----------------|---------|-----------|-----------|--------|--------|--|--|--|--|--|--|--|--|
| MMK 80-30° | 2.04MMK1.000015 | PN10/16 | 80 | 98 | 45 | 7 | | | | | | | | |
| MMK 100-30° | 2.04MMK1.010015 | PN10/16 | 100 | 118 | 50 | 10 | | | | | | | | |
| MMK 125-30° | 2.04MMK1.010025 | PN10/16 | 125 | 144 | 55 | 17 | | | | | | | | |
| MMK 150-30° | 2.04MMK1.010035 | PN10/16 | 150 | 170 | 65 | 15 | | | | | | | | |
| MMK 200-30° | 2.04MMK1.020015 | PN10/16 | 200 | 222 | 80 | 23 | | | | | | | | |
| MMK 250-30° | 2.04MMK1.020025 | PN10/16 | 250 | 274 | 95 | 28 | | | | | | | | |
| MMK 300-30° | 2.04MMK1.030015 | PN10/16 | 300 | 326 | 110 | 42 | | | | | | | | |
| MMK 350-30° | 2.04MMK1.030025 | PN10/16 | 350 | 378 | 125 | 50 | | | | | | | | |
| MMK 400-30° | 2.04MMK1.040015 | PN10/16 | 400 | 429 | 140 | 65 | | | | | | | | |
| MMK 450-30° | 2.04MMK1.040025 | PN10/16 | 450 | 477 | 160 | 85 | | | | | | | | |
| MMK 500-30° | 2.04MMK1.050015 | PN10/16 | 500 | 532 | 180 | 110 | | | | | | | | |
| MMK 600-30° | 2.04MMK1.060015 | PN10/16 | 600 | 635 | 200 | 160 | | | | | | | | |
| MMK 700-30° | 2.04MMK1.070015 | PN10/16 | 700 | 738 | 230 | 254 | | | | | | | | |
| MMK 800-30° | 2.04MMK1.080015 | PN10/16 | 800 | 842 | 260 | 346 | | | | | | | | |
| MMK 900-30° | 2.04MMK1.090015 | PN10/16 | 900 | 948 | 290 | 490 | | | | | | | | |
| MMK 1000-30° | 2.04MMK1.100015 | PN10/16 | 1000 | 1048 | 320 | 620 | | | | | | | | |
| MMK 1200-30° | 2.04MMK1.120015 | PN10/16 | 1200 | 1255 | 380 | 960 | | | | | | | | |